

**SBC Z XTS**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) 

# SBC Z XTS

CS Italia s.r.l.

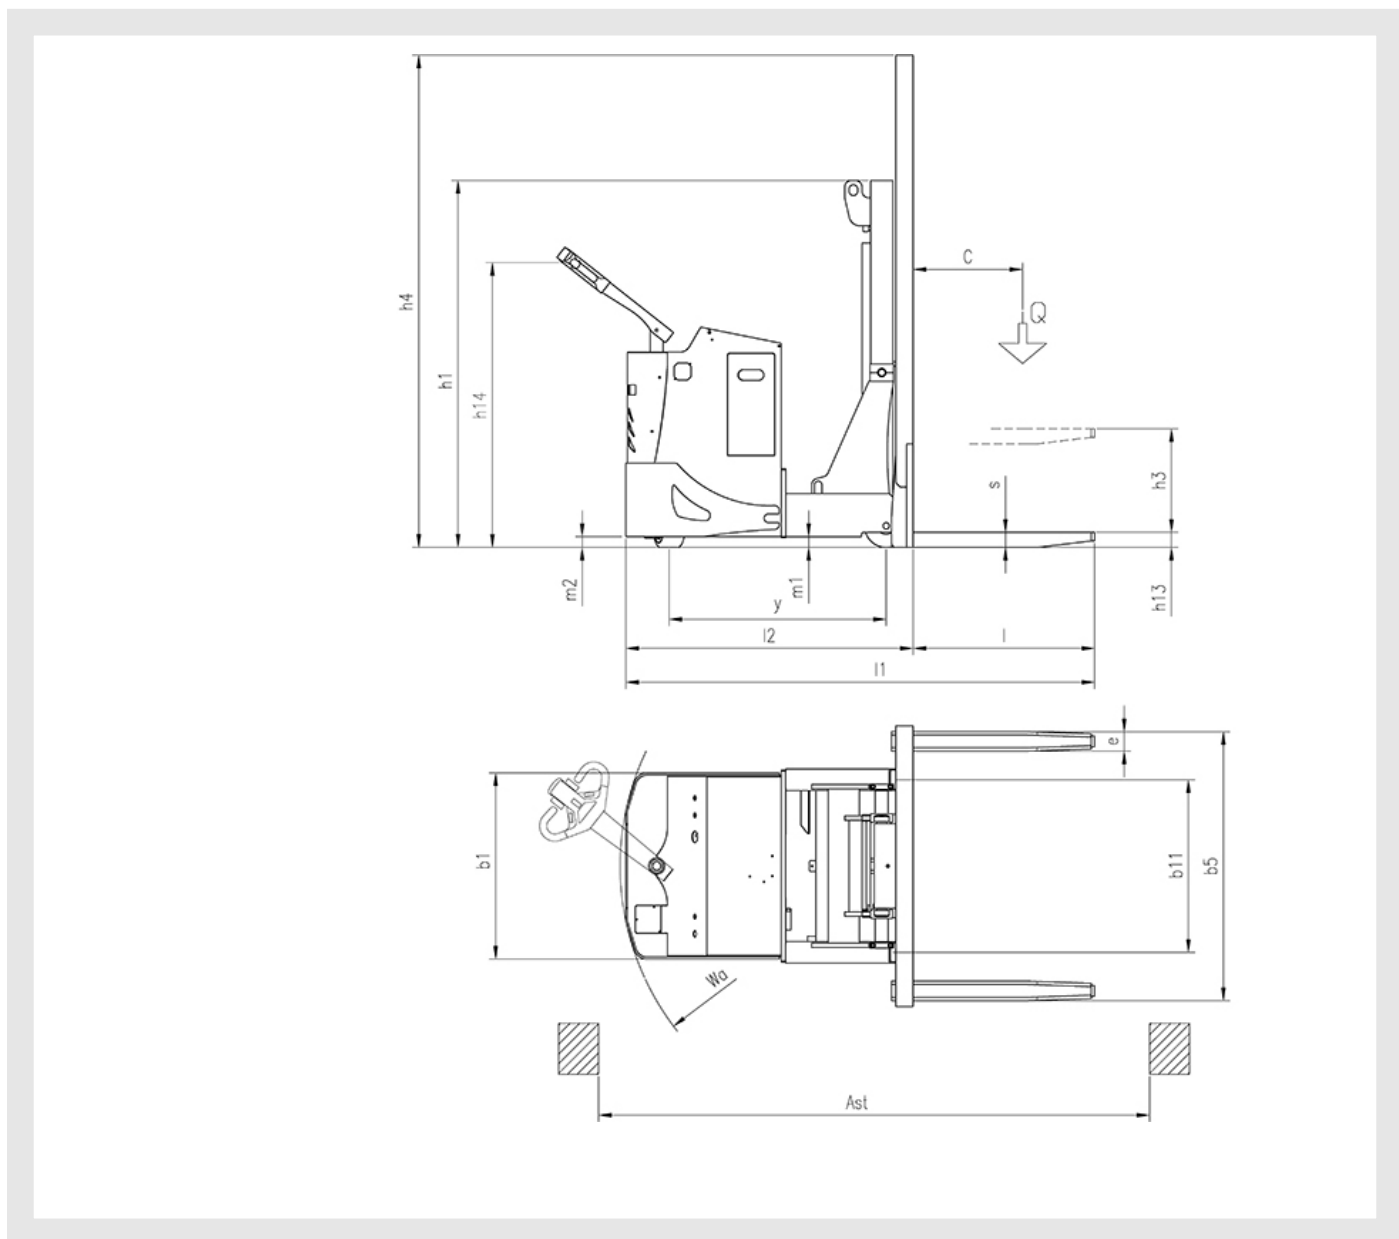

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** SBC Z XTS

**Categoria** Contrappesati

|                           |               |  |       |      |               |
|---------------------------|---------------|--|-------|------|---------------|
| <b>General info</b>       | 1.1           | Manufacturer                                     |       |      | CSI s.r.l.    |
|                           | 1.2           | Model  |       |      | SBC Z XTS     |
|                           | 1.3           | Drive  |       |      | elettrico AC  |
|                           | 1.4           | Operator type                                    |       |      | a timone      |
|                           | 1.5           | Load capacity                                    | Q     | t    | 1.6           |
|                           | 1.6           | Load centre                                      | c     | mm   | 400           |
|                           | 1.9           | Wheelbase  | y     | mm   | 1005          |
| <b>Weights</b>            | 2.1           | Truck weight without battery                     |       | Kg   | 2400          |
| <b>Wheels and chassis</b> | 3.1           | Wheels   |       |      | Poliuretano   |
|                           | 3.2           | Wheels size front                                |       | mm   | 254x100       |
|                           | 3.3           | Wheels size rear                                 |       | mm   | 200x80        |
|                           | 3.5           | Number of rear/front wheels (x = Traction wheel) |       |      | 1x/2          |
|                           | 3.7           | Rear wheelbase                                   | b11   | mm   | 825           |
| <b>Dimensions</b>         | 4.1           | Tilt   |       | °    | 2°/2°         |
|                           | 4.2           | Height mast lowered                              | h1    | mm   | 2280          |
|                           | 4.4           | Lift height                                      | h3    | mm   | 550           |
|                           | 4.5           | Height mast extended                             | h4    | mm   | 2760          |
|                           | 4.9           | Height of tiller (min/max)                       | h14   | mm   | 975/1535      |
|                           | 4.15          | Height forks lowered                             | h13   | mm   | 40            |
|                           | 4.19          | Overall length                                   | l1    | mm   | 2170          |
|                           | 4.20          | Length to face of forks                          | l2    | mm   | 1330          |
|                           | 4.21          | Overall width                                    | b1    | mm   | 862           |
|                           | 4.22          | Forks dimensions                                 | s/e/l | mm   | 70/90/840     |
|                           | 4.31          | Ground clearance                                 |       | mm   | 40            |
|                           | 4.35          | Turning radius                                   | wa    | mm   | 1235          |
| <b>Performance</b>        | 5.1           | Travel speed with/without load                   |       | Km/h | 2/5           |
|                           | 5.2           | Lifting speed with/without load                  |       | m/s  | 0,11/0,33     |
|                           | 5.3           | Lowering speed with/without load                 |       | m/s  | 0,5/0,2       |
|                           | 5.8           | Maximum gradeability with/without load           |       | %    | 1/3           |
|                           | 5.10          | Service brake                                    |       |      | elettrico     |
| <b>Motor</b>              | 6.1           | Traction motor S2 60 min.                        |       | Kw   | 2.5           |
|                           | 6.2           | Lift motor S3                                    |       | Kw   | 3             |
|                           | 6.3           | Battery  |       |      | Piombo acido  |
|                           | 6.4           | Battery - voltage and nominal capacity           |       | V/Ah | 24V/240 Ah    |
|                           | 6.5           | Battery weight                                   |       | Kg   | 210           |
|                           | Dim. batteria | Battery size                                     |       | mm   | 810x210x450   |
| <b>Other</b>              | 8.1           | Traction control                                 |       |      | proporzionale |
|                           | 8.4           | Noise level driver place                         |       |      | <70           |