

**K9 OB XT 22**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) 

# K9 OB XT 22

CS Italia s.r.l.

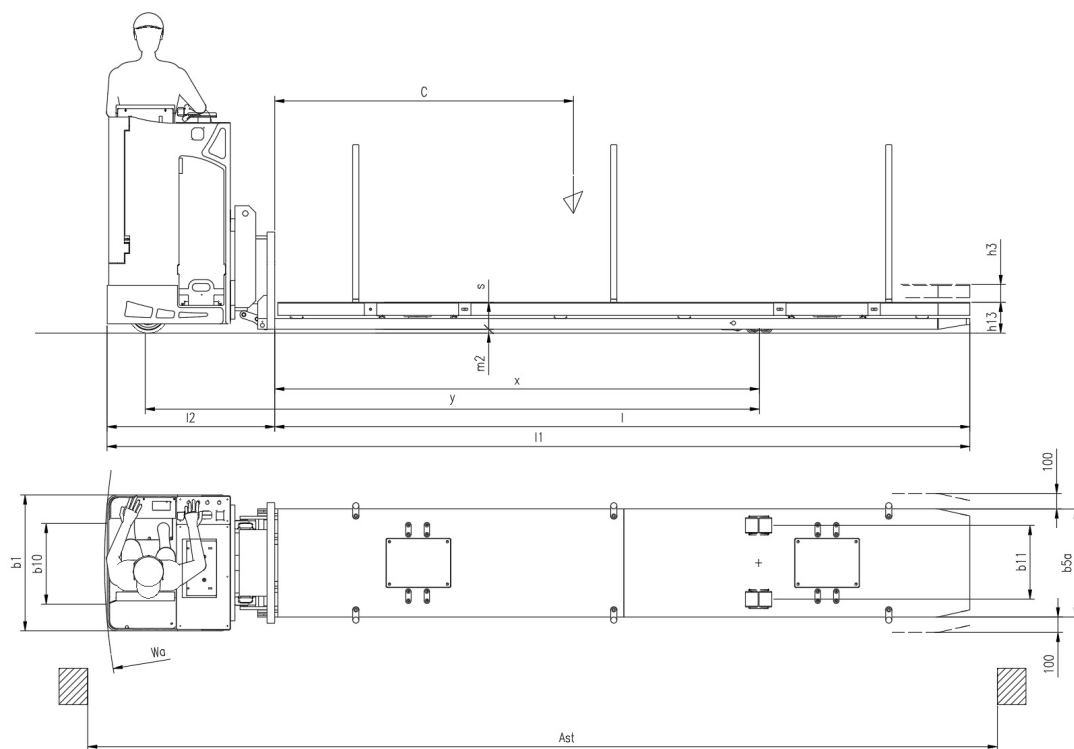

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** K9 OB XT 22

**Categoria** Pianali

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			K9 OB XT 22
	1.3	Drive			elettrico AC
	1.4	Operator type			a volante
	1.5	Load capacity	Q	t	1
	1.6	Load centre	c	mm	1950
	1.8	Load distance to wheel axle	x	mm	3140
	1.9	Wheelbase	y	mm	3980
	<b>Weights</b>				
	2.1	Truck weight without battery		Kg	2300
<b>Wheels and chassis</b>					
	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	254x100
	3.3	Wheels size rear		mm	80x80
	3.4	Additional wheels size		mm	150x50
	3.5	Number of rear/front wheels (x = Traction wheel)			1x+2/2+2
	3.6	Front wheelbase	b10	mm	500
	3.7	Rear wheelbase	b11	mm	470
<b>Dimensions</b>					
	4.4	Lift height	h3	mm	115
	4.15	Height forks lowered	h13	mm	200
	4.19	Overall length	l1	mm	5590
	4.20	Length to face of forks	l2	mm	1080
	4.21	Overall width	b1	mm	880
	4.22	Forks dimensions	s/e/l	mm	175/700/4500
	4.25a	Overall platform width size	b5a	mm	700
	4.31	Ground clearance		mm	40
	4.32	Distanza da piano di lavoro a inizio forca	m2	mm	40
	4.34	Aisle width	ast	mm	5900
	4.35	Turning radius	wa	mm	4240
<b>Performance</b>					
	5.1	Travel speed with/without load		Km/h	3/6
	5.2	Lifting speed with/without load		m/s	0.11/0.33
	5.3	Lowering speed with/without load		m/s	0.5/0.2
	5.8	Maximum gradeability with/without load		%	1/3
	5.10	Service brake			elettrico
<b>Motor</b>					
	6.1	Traction motor S2 60 min.		Kw	2.5
	6.2	Lift motor S3		Kw	2.2
	6.3	Battery			Piombo acido
	6.4	Battery - voltage and nominal capacity		V/Ah	24V 240Ah
	6.5	Battery weight		Kg	360
	Dim. batteria	Battery size		mm	800/280/800
<b>Other</b>					
	8.1	Traction control			proporzionale
	8.4	Noise level driver place			<70