

**K9 SBM XT HD 80 a catena**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) 

# K9 SBM XT HD 80 a catena

CS Italia s.r.l.

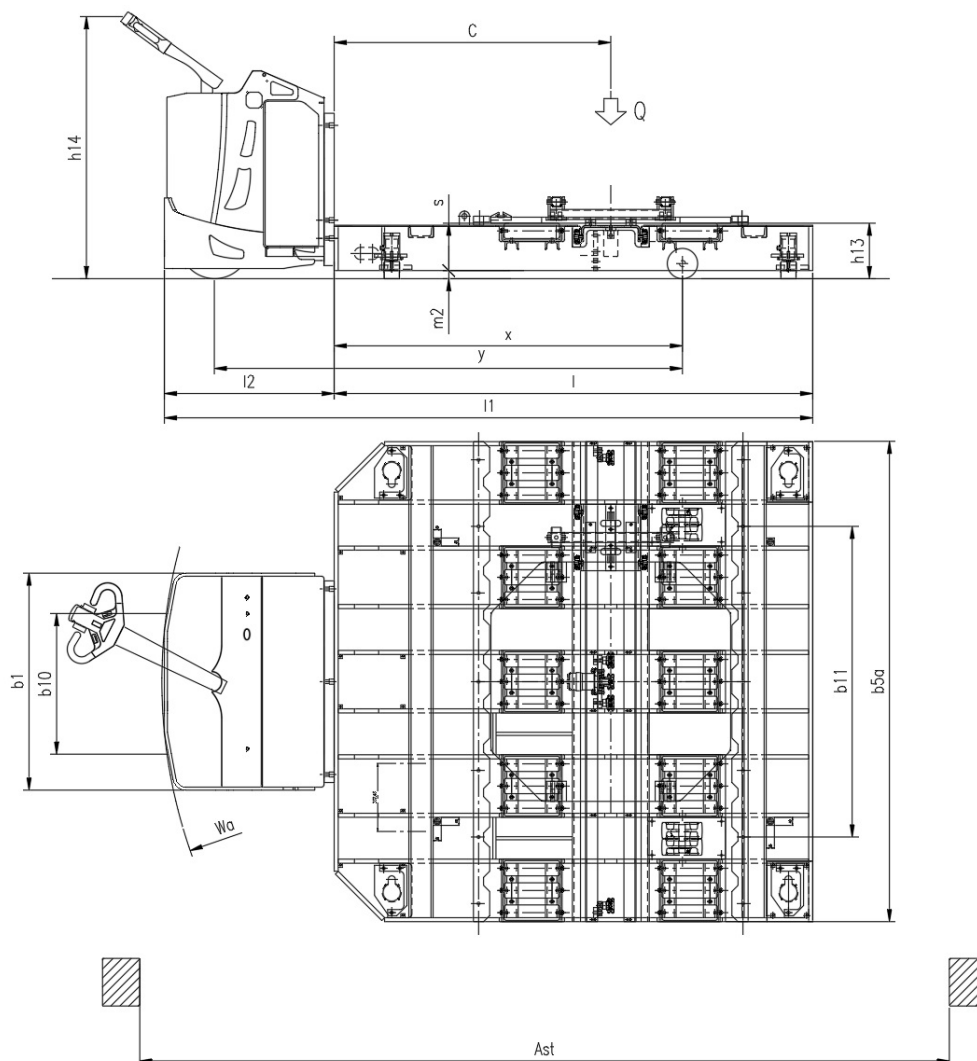

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** K9 SBM XT HD 80 a catena

**Categoria** Pianali

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			K9 SBM XT HD 80 a catena
	1.3	Drive			elettrico AC
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	8
	1.6	Load centre	c	mm	1370
	1.8	Load distance to wheel axle	x	mm	1725
	1.9	Wheelbase	y	mm	1820
	<b>Weights</b>				
	2.1	Truck weight without battery		Kg	3300
<b>Wheels and chassis</b>					
	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	350x140
	3.3	Wheels size rear		mm	150X80
	3.4	Additional wheels size		mm	200X80
	3.5	Number of rear/front wheels (x = Traction wheel)			1x/2+2/4
	3.6	Front wheelbase	b10	mm	600
	3.7	Rear wheelbase	b11	mm	1540
<b>Dimensions</b>					
	4.9	Height of tiller (min/max)	h14	mm	975/1535
	4.15	Height forks lowered	h13	mm	275
	4.20	Length to face of forks	l2	mm	840
	4.21	Overall width	b1	mm	1076
	4.22	Forks dimensions	s/e/l	mm	235/2380/2370
	4.25a	Overall platform width size	b5a	mm	2380
	4.31	Ground clearance		mm	40
	4.32	Distanza da piano di lavoro a inizio forca	m2	mm	40
	4.34	Aisle width	ast	mm	3920
	4.35	Turning radius	wa	mm	2570
<b>Performance</b>					
	5.1	Travel speed with/without load		Km/h	3/5
	5.8	Maximum gradeability with/without load		%	1/3
	5.10	Service brake			elettrico
<b>Motor</b>					
	6.1	Traction motor S2 60 min.		Kw	5
	6.3	Battery			no
	6.4	Battery - voltage and nominal capacity		V/Ah	48v 250ah
	6.5	Battery weight		Kg	420
	Dim. batteria	Battery size		mm	1015/255/627
<b>Other</b>					
	8.1	Traction control			proporzionale
	8.4	Noise level driver place			<70