

**K9 SOB HEAVY DUTY 200**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) ✉

# K9 SOB HEAVY DUTY 200

CS Italia s.r.l.

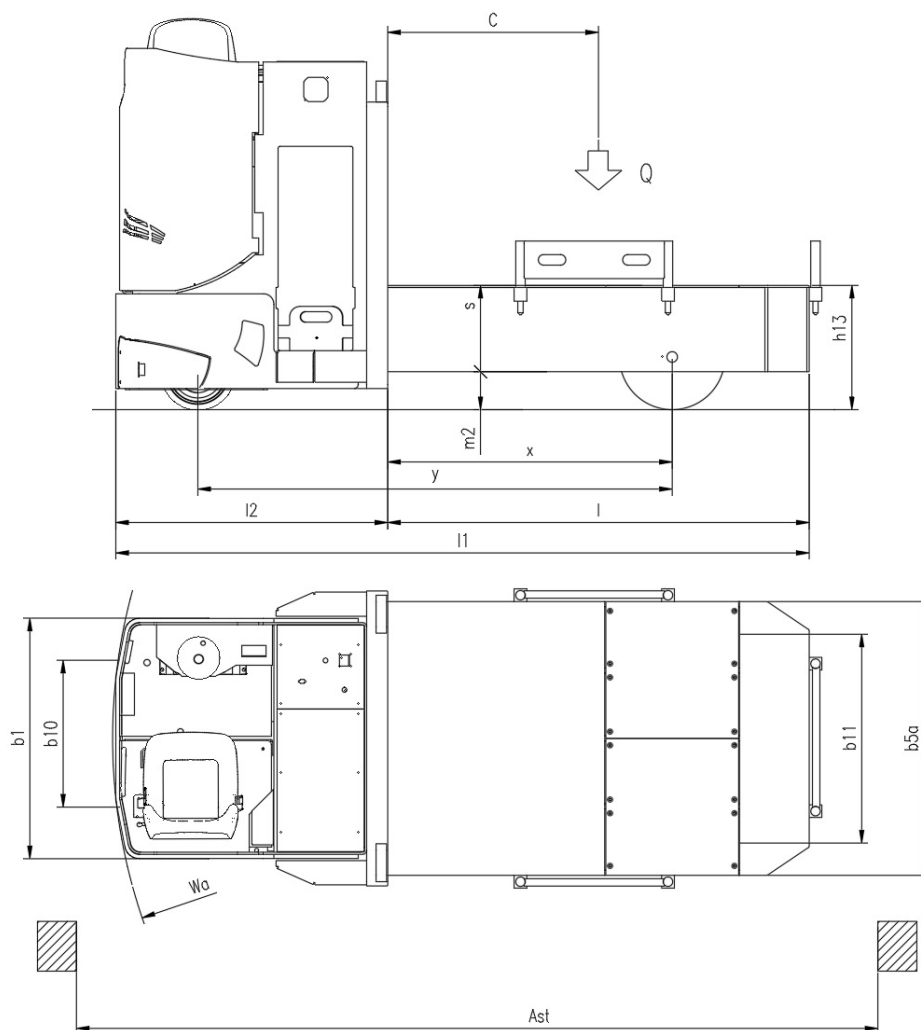

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** K9 SOB HEAVY DUTY 200

**Categoria** Pianali

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			K9 SOB HEAVY DUTY 200
	1.3	Drive			elettrico AC
	1.4	Operator type			a volante
	1.5	Load capacity	Q	t	20
	1.6	Load centre	c	mm	1000
	1.8	Load distance to wheel axle	x	mm	1350
	1.9	Wheelbase	y	mm	2250
	<b>Weights</b>	2.1	Truck weight without battery		Kg
<b>Wheels and chassis</b>	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	350x140
	3.3	Wheels size rear		mm	500x200
	3.5	Number of rear/front wheels (x = Traction wheel)			2x/2+2
	3.6	Front wheelbase	b10	mm	550
	3.7	Rear wheelbase	b11	mm	950
	<b>Dimensions</b>	4.15	Height forks lowered	h13	mm
4.19		Overall length	l1	mm	3290
4.20		Length to face of forks	l2	mm	1290
4.21		Overall width	b1	mm	1140
4.22		Forks dimensions	s/e/l	mm	410/1300/2000
4.25a		Overall platform width size	b5a	mm	1300
4.31		Ground clearance		mm	70
4.32		Distanza da piano di lavoro a inizio forca	m2	mm	180
4.34		Aisle width	ast	mm	3800
4.35		Turning radius	wa	mm	2650
<b>Performance</b>	5.1	Travel speed with/without load		Km/h	2/5
	5.2	Lifting speed with/without load		m/s	/
	5.3	Lowering speed with/without load		m/s	0,26/0,06
	5.8	Maximum gradeability with/without load		%	0 / 2
	5.10	Service brake			elettrico
<b>Motor</b>	6.1	Traction motor S2 60 min.		Kw	5
	6.3	Battery			Piombo acido
	6.4	Battery - voltage and nominal capacity		V/Ah	48V320Ah
	6.5	Battery weight		Kg	500
	Dim. batteria	Battery size		mm	1015/340/780
<b>Other</b>	8.1	Traction control			proporzionale
	8.4	Noise level driver place			<70