


K9 SBM XT HD 80


CS Italia s.r.l.

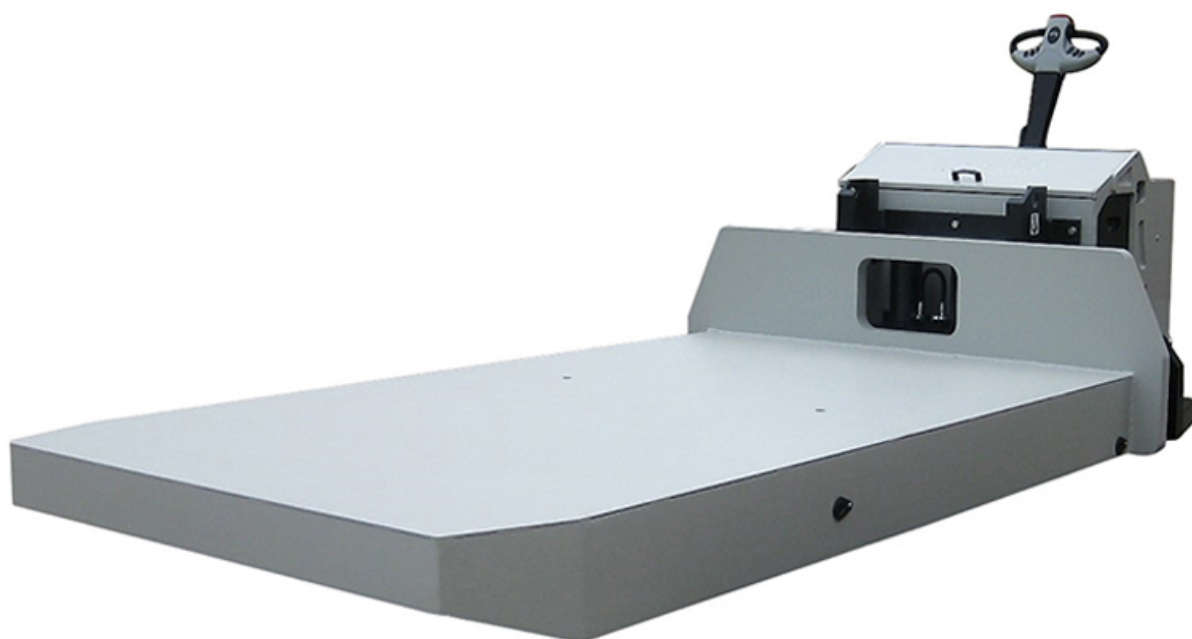

Optional su richiesta info@carrellispeciali.it 

K9 SBM XT HD 80

CS Italia s.r.l.

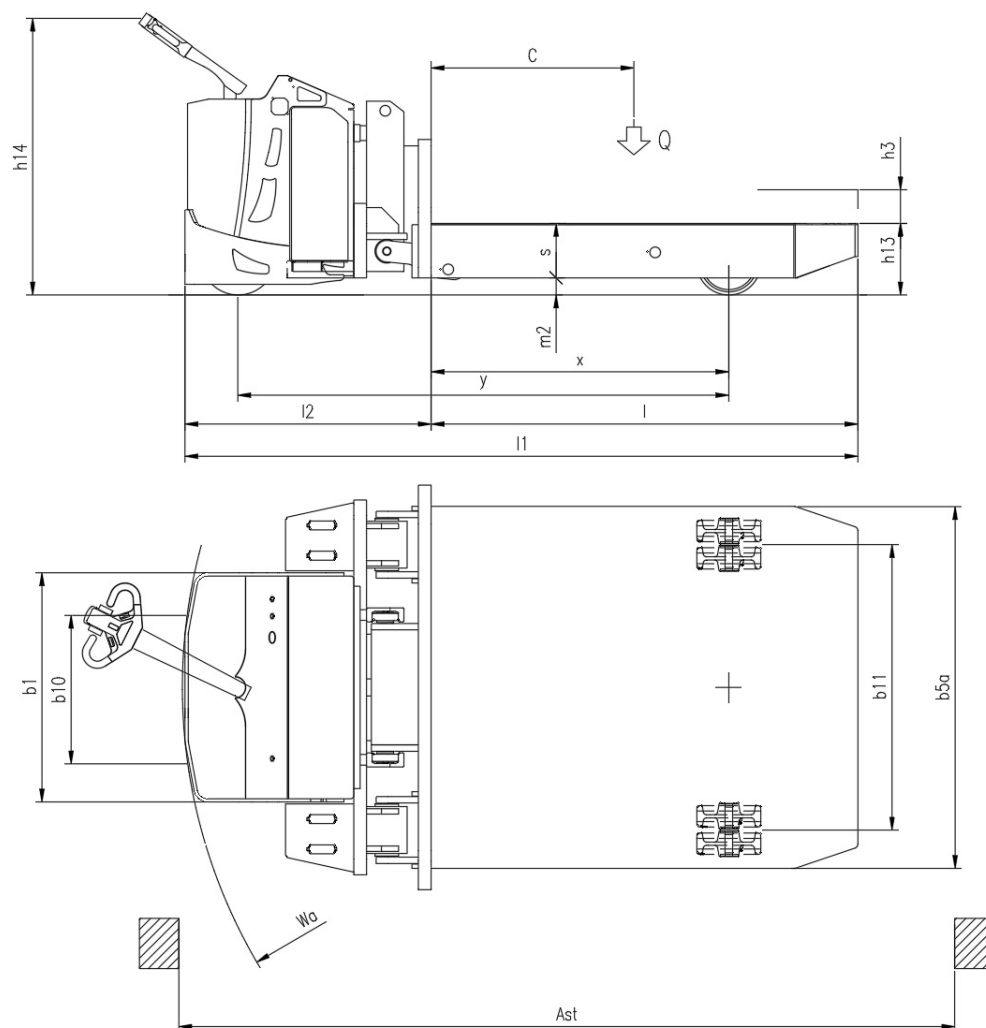

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

Tipologia K9 SBM XT HD 80

Categoria Pianali

General info	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			K9 SBM XT HD 80
	1.3	Drive			elettrico AC
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	8
	1.6	Load centre	c	mm	1000
	1.8	Load distance to wheel axle	x	mm	1400
	1.9	Wheelbase	y	mm	2300
	Weights				
	2.1	Truck weight without battery		Kg	3080
Wheels and chassis					
	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	350x140
	3.3	Wheels size rear		mm	300X100
	3.4	Additional wheels size		mm	200x80
	3.5	Number of rear/front wheels (x = Traction wheel)			1x+2/2+2
	3.6	Front wheelbase	b10	mm	600
	3.7	Rear wheelbase	b11	mm	1340
Dimensions					
	4.4	Lift height	h3	mm	115
	4.9	Height of tiller (min/max)	h14	mm	975/1535
	4.15	Height forks lowered	h13	mm	340
	4.19	Overall length	l1	mm	2780
	4.20	Length to face of forks	l2	mm	1160
	4.21	Overall width	b1	mm	1076
	4.22	Forks dimensions	s/e/l	mm	260/1700/2000
	4.25a	Overall platform width size	b5a	mm	1700
	4.31	Ground clearance		mm	40
	4.32	Distanza da piano di lavoro a inizio forca	m2	mm	80
	4.34	Aisle width	ast	mm	1405
	4.35	Turning radius	wa	mm	2030
Performance					
	5.1	Travel speed with/without load		Km/h	3/6
	5.2	Lifting speed with/without load		m/s	0.11/0.33
	5.3	Lowering speed with/without load		m/s	0.5/0.2
	5.8	Maximum gradeability with/without load		%	0 / 2
	5.10	Service brake			elettrico
Motor					
	6.1	Traction motor S2 60 min.		Kw	5
	6.2	Lift motor S3		Kw	2
	6.3	Battery			Piombo acido
	6.4	Battery - voltage and nominal capacity		V/Ah	48V250Ah
	6.5	Battery weight		Kg	420
	Dim. batteria	Battery size		mm	1015/255/627
Other					
	8.1	Traction control			proporzionale
	8.4	Noise level driver place			<70