

4 Vie 3516 - 4 FORCHE


CS Italia s.r.l.



Optional su richiesta info@carrellispeciali.it 

4Vie 3516 - 4 FORCHE

CS Italia s.r.l.

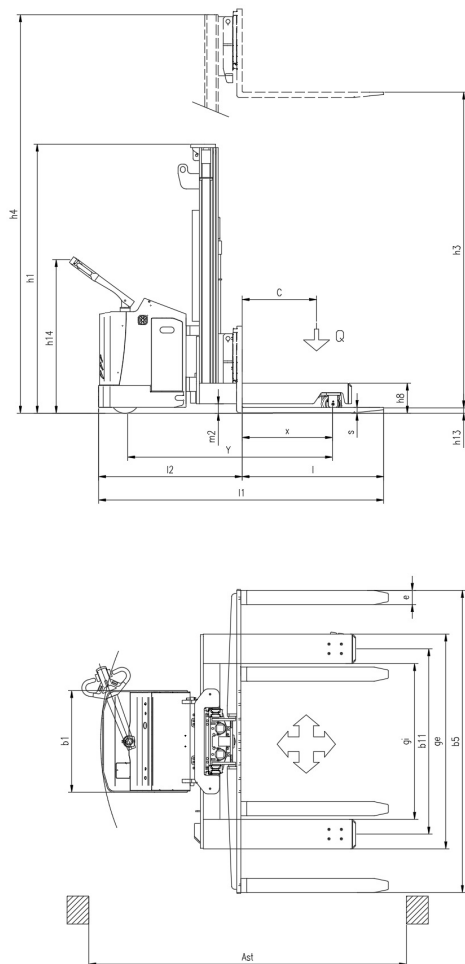

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

Tipologia 4Vie 3516 - 4 FORCHE

Categoria

General info	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			4Vie 3516 - 4 FORCHE
	1.3	Drive			elettrico AC
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	1.6
	1.6	Load centre	c	mm	600
	1.8	Load distance to wheel axle	x	mm	760
	1.9	Wheelbase	y	mm	1730
	Weights				
2.1	Truck weight without battery			Kg	900
Wheels and chassis					
3.1	Wheels				Poliuretano
3.2	Wheels size front			mm	254x100
3.3	Wheels size rear			mm	150x50
3.5	Number of rear/front wheels (x = Traction wheel)				1x/2+2
3.7	Rear wheelbase	b11		mm	1570
3.9	Overall width legs	ge		mm	1820
3.10	Inside width legs	gi		mm	1320
3.11	Legs height	h8		mm	255
Dimensions					
4.1	Tilt			°	-1/+2
4.2	Height mast lowered	h1		mm	2420
4.3	Free lift	h2		mm	1910
4.4	Lift height	h3		mm	3460
4.5	Height mast extended	h4		mm	4030
4.9	Height of tiller (min/max)	h14		mm	975/1535
4.15	Height forks lowered	h13		mm	40
4.19	Overall length	l1		mm	2380
4.20	Length to face of forks	l2		mm	1180
4.21	Overall width	b1		mm	862
4.22	Forks dimensions	s/e/l		mm	35/100/1200
4.23	Carriage forks				FEM 2A
4.25	Overall forks width size	b5		mm	220-2560
4.31	Ground clearance			mm	40
4.34	Aisle width	ast		mm	2670
4.35	Turning radius	wa		mm	2005
Performance					
5.1	Travel speed with/without load			Km/h	3/6
5.2	Lifting speed with/without load			m/s	0.11/0.33
5.3	Lowering speed with/without load			m/s	0.5/0.2
5.8	Maximum gradeability with/without load			%	2/3
5.10	Service brake				elettrico
Motor					
6.1	Traction motor S2 60 min.			Kw	2.5
6.2	Lift motor S3			Kw	3
6.3	Battery				Piombo acido
6.4	Battery - voltage and nominal capacity			V/Ah	24V 420 Ah
6.5	Battery weight			Kg	320
Dim. batteria	Battery size			mm	810/257/575
Other					
8.1	Traction control				elettronico

DATI TECNICI 8.4

Noise level driver place

<70