

**SBC XTS 4VR 0516**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) 

# SBC XTS 4VR 0516

CS Italia s.r.l.

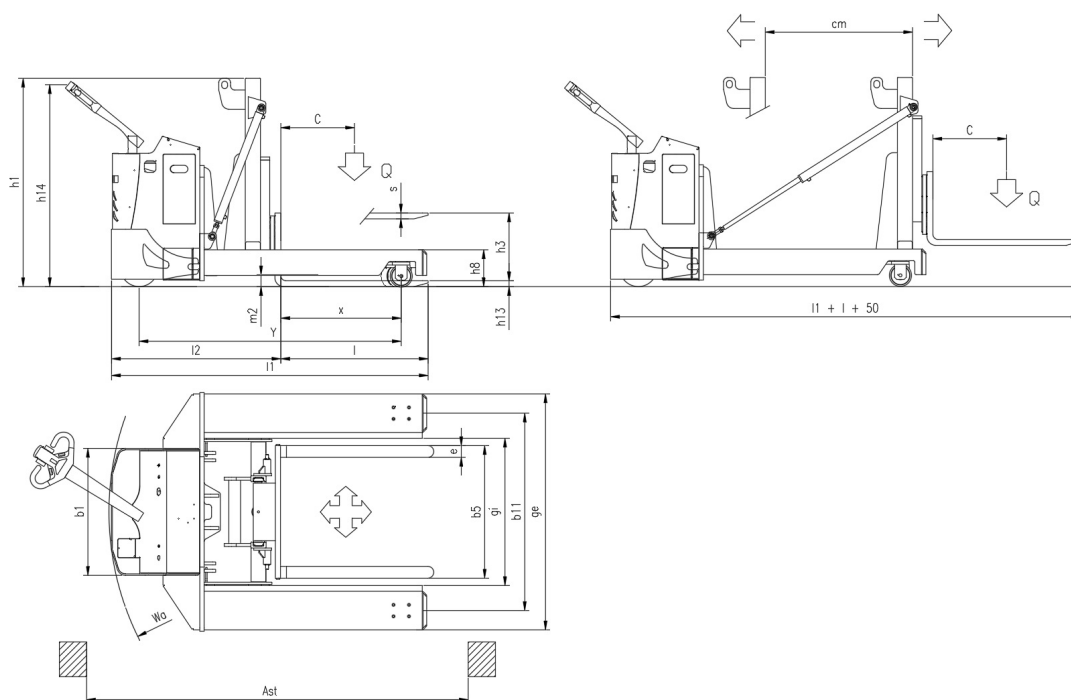

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** SBC XTS 4VR 0516

**Categoria**

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			SBC XTS 4VR 0516
	1.3	Drive			elettrico AC
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	1.6
	1.6	Load centre	c	mm	500
	1.8	Load distance to wheel axle	x	mm	800
	1.9	Wheelbase	y	mm	1780
	<b>Weights</b>				
	2.1	Truck weight without battery		Kg	2100
<b>Wheels and chassis</b>					
	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	254x100
	3.3	Wheels size rear		mm	150x50
	3.5	Number of rear/front wheels (x = Traction wheel)			1x/2+2
	3.7	Rear wheelbase	b11	mm	1340
	3.9	Overall width legs	ge	mm	1600
	3.10	Inside width legs	gi	mm	1000
	3.11	Legs height	h8	mm	255
<b>Dimensions</b>					
	4.2	Height mast lowered	h1	mm	1450
	4.4	Lift height	h3	mm	460
	4.9	Height of tiller (min/max)	h14	mm	975/1535
	4.10	Mast raise	cm	mm	1000
	4.15	Height forks lowered	h13	mm	40
	4.19	Overall length	l1	mm	2150
	4.20	Length to face of forks	l2	mm	1150
	4.21	Overall width	b1	mm	862
	4.22	Forks dimensions	s/e/l	mm	35/100/1000
	4.23	Carriage forks			FEM 2A
	4.25	Overall forks width size	b5	mm	220-900
	4.31	Ground clearance		mm	40
	4.34	Aisle width	ast	mm	2540
	4.35	Turning radius	wa	mm	1930
<b>Performance</b>					
	5.1	Travel speed with/without load		Km/h	3/5
	5.2	Lifting speed with/without load		m/s	0.11/0.33
	5.3	Lowering speed with/without load		m/s	0.5/0.2
	5.8	Maximum gradeability with/without load		%	1/3
	5.10	Service brake			elettrico
<b>Motor</b>					
	6.1	Traction motor S2 60 min.		Kw	2.5
	6.2	Lift motor S3		Kw	3
	6.3	Battery			Piombo acido
	6.4	Battery - voltage and nominal capacity		V/Ah	24V 210Ah
	6.5	Battery weight		Kg	210
	Dim. batteria	Battery size		mm	810/210/450
<b>Other</b>					
	8.1	Traction control			elettronico
	8.4	Noise level driver place			<70