

**SBC XTS 4VR 0516**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) 

# SBC XTS 4VR 0516

CS Italia s.r.l.

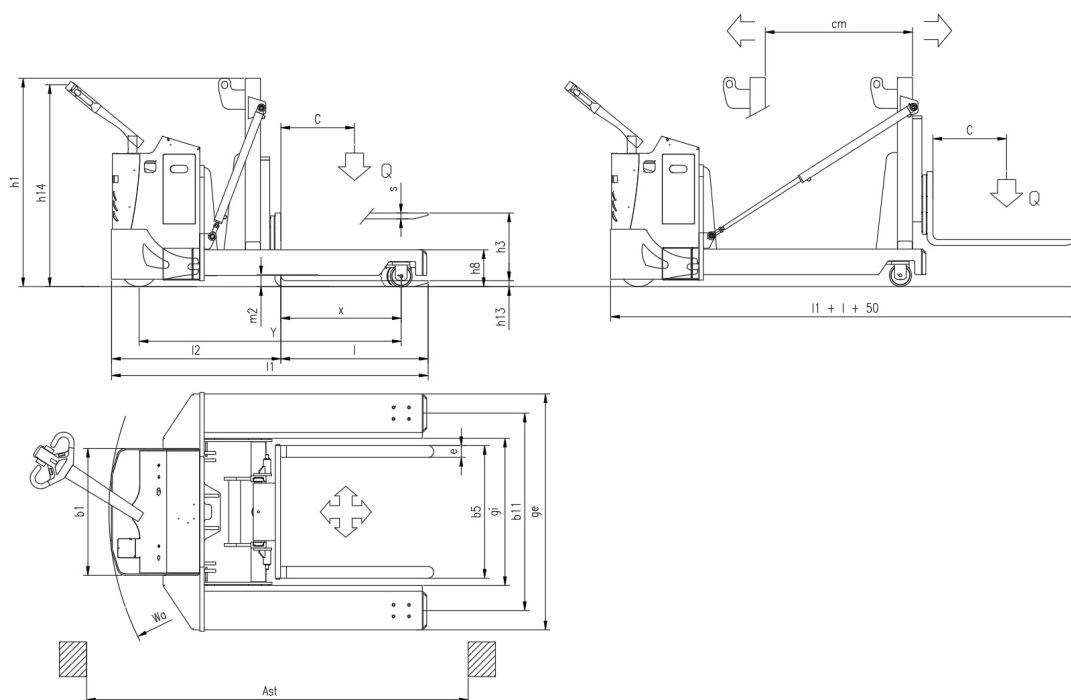

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** SBC XTS 4VR 0516

**Categoria**

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			SBC XTS 4VR 0516
	1.3	Drive			elettrico AC
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	1.6
	1.6	Load centre	c	mm	500
	1.8	Load distance to wheel axle	x	mm	800
	1.9	Wheelbase	y	mm	1780
	<b>Weights</b>				
2.1	Truck weight without battery			Kg	2100
<b>Wheels and chassis</b>					
3.1	Wheels				Poliuretano
3.2	Wheels size front			mm	254x100
3.3	Wheels size rear			mm	150x50
3.5	Number of rear/front wheels (x = Traction wheel)				1x/2+2
3.7	Rear wheelbase	b11		mm	1340
3.9	Overall width legs	ge		mm	1600
3.10	Inside width legs	gi		mm	1000
3.11	Legs height	h8		mm	255
<b>Dimensions</b>					
4.2	Height mast lowered	h1		mm	1450
4.4	Lift height	h3		mm	460
4.9	Height of tiller (min/max)	h14		mm	975/1535
4.10	Mast raise	cm		mm	1000
4.15	Height forks lowered	h13		mm	40
4.19	Overall length	l1		mm	2150
4.20	Length to face of forks	l2		mm	1150
4.21	Overall width	b1		mm	862
4.22	Forks dimensions	s/e/l		mm	35/100/1000
4.23	Carriage forks				FEM 2A
4.25	Overall forks width size	b5		mm	220-900
4.31	Ground clearance			mm	40
4.34	Aisle width	ast		mm	2540
4.35	Turning radius	wa		mm	1930
<b>Performance</b>					
5.1	Travel speed with/without load			Km/h	3/5
5.2	Lifting speed with/without load			m/s	0.11/0.33
5.3	Lowering speed with/without load			m/s	0.5/0.2
5.8	Maximum gradeability with/without load			%	1/3
5.10	Service brake				elettrico
<b>Motor</b>					
6.1	Traction motor S2 60 min.			Kw	2.5
6.2	Lift motor S3			Kw	3
6.3	Battery				Piombo acido
6.4	Battery - voltage and nominal capacity			V/Ah	24V 210Ah
6.5	Battery weight			Kg	210
Dim. batteria	Battery size			mm	810/210/450
<b>Other</b>					
8.1	Traction control				elettronico
8.4	Noise level driver place				<70