


SBP TX 1160


CS Italia s.r.l.

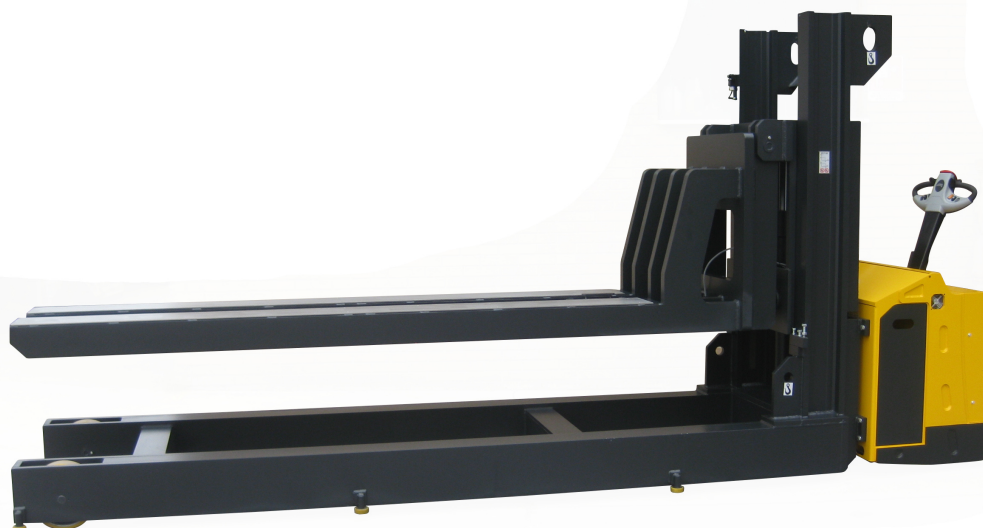

Optional su richiesta info@carrellispeciali.it 

SBP TX 1160

CS Italia s.r.l.

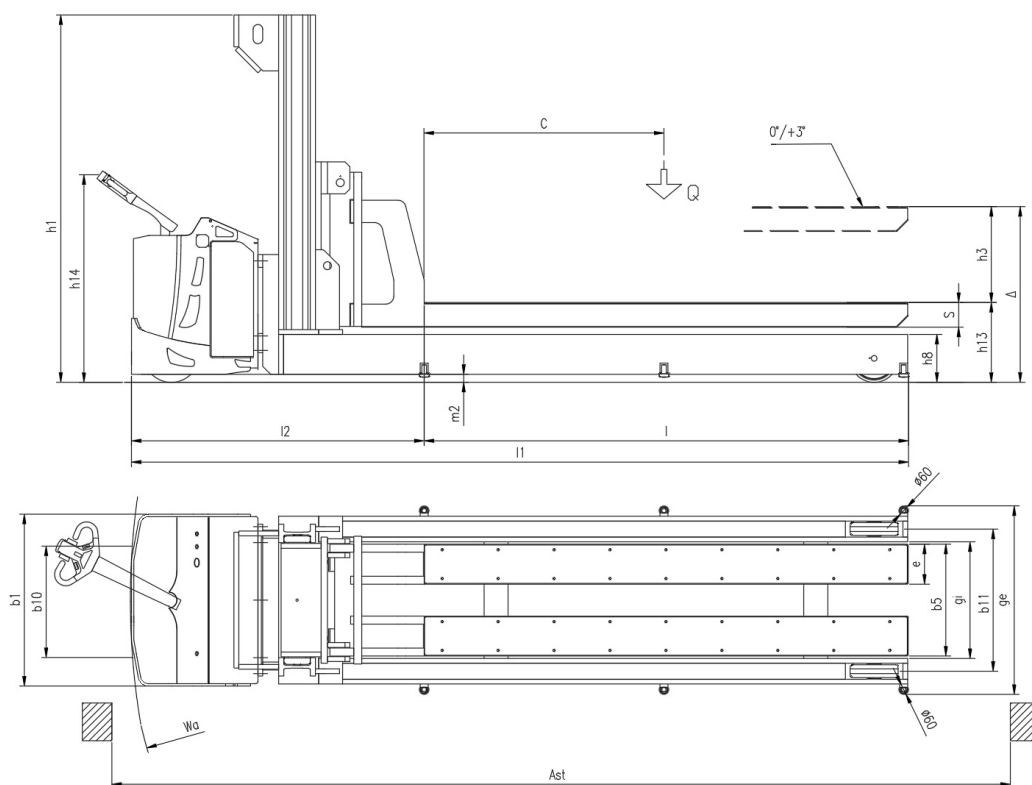

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

Tipologia SBP TX 1160

Categoria

| | | | | | |
|---------------------------|-------------------|--|--------------------------------|------|---------------|
| General info | 1.1 | Manufacturer | | | CSI s.r.l. |
| | 1.2 | Model | | | SBP TX 1160 |
| | 1.3 | Drive | | | elettrico AC |
| | 1.4 | Operator type | | | a timone |
| | 1.5 | Load capacity | Q | t | 2 |
| | 1.6 | Load centre | c | mm | 1500 |
| | 1.9 | Wheelbase | y | mm | 4400 |
| | Weights | 2.1 | Truck weight without battery | | Kg |
| Wheels and chassis | 3.1 | Wheels | | | Poliuretano |
| | 3.2 | Wheels size front | | mm | 350x140 |
| | 3.3 | Wheels size rear | | mm | 300x80 |
| | 3.4 | Additional wheels size | | mm | 200x80 |
| | 3.5 | Number of rear/front wheels (x = Traction wheel) | | | 1X+2 / 1+1 |
| | 3.6 | Front wheelbase | b10 | mm | 600 |
| | 3.7 | Rear wheelbase | b11 | mm | 890 |
| | 3.9 | Overall width legs | ge | mm | 1180 |
| | 3.10 | Inside width legs | gi | mm | 730 |
| | 3.11 | Legs height | h8 | mm | 300 |
| | Dimensions | 4.1 | Tilt | | ° |
| 4.2 | | Height mast lowered | h1 | mm | 2300 |
| 4.4 | | Lift height | h3 | mm | 600 |
| 4.9 | | Height of tiller (min/max) | h14 | mm | 975/1535 |
| 4.15 | | Height forks lowered | h13 | mm | 500 |
| 4.19 | | Overall length | l1 | mm | 4860 |
| 4.20 | | Length to face of forks | l2 | mm | 1830 |
| 4.21 | | Overall width | b1 | mm | 1076 |
| 4.22 | | Forks dimensions | s/e/l | mm | 155/250/3020 |
| 4.25 | | Overall forks width size | b5 | mm | 700 |
| 4.31 | | Ground clearance | | mm | 40 |
| 4.34 | | Aisle width | ast | mm | 5600 |
| 4.35 | | Turning radius | wa | mm | 4650 |
| Performance | | 5.1 | Travel speed with/without load | | Km/h |
| | 5.2 | Lifting speed with/without load | | m/s | 0.11/0.33 |
| | 5.3 | Lowering speed with/without load | | m/s | 0.5/0.2 |
| | 5.8 | Maximum gradeability with/without load | | % | 1/3 |
| | 5.10 | Service brake | | | elettrico |
| Motor | 6.1 | Traction motor S2 60 min. | | Kw | 5 |
| | 6.2 | Lift motor S3 | | Kw | 2 |
| | 6.3 | Battery | | | Piombo acido |
| | 6.4 | Battery - voltage and nominal capacity | | V/Ah | 48v 250ah |
| | 6.5 | Battery weight | | Kg | 420 |
| | Dim. batteria | Battery size | | mm | 1015/255/627 |
| Other | 8.1 | Traction control | | | proporzionale |
| | 8.4 | Noise level driver place | | | <70 |