

**SBP TX 3220 SPO**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) 

# SBP TX 3220 SP0

CS Italia s.r.l.

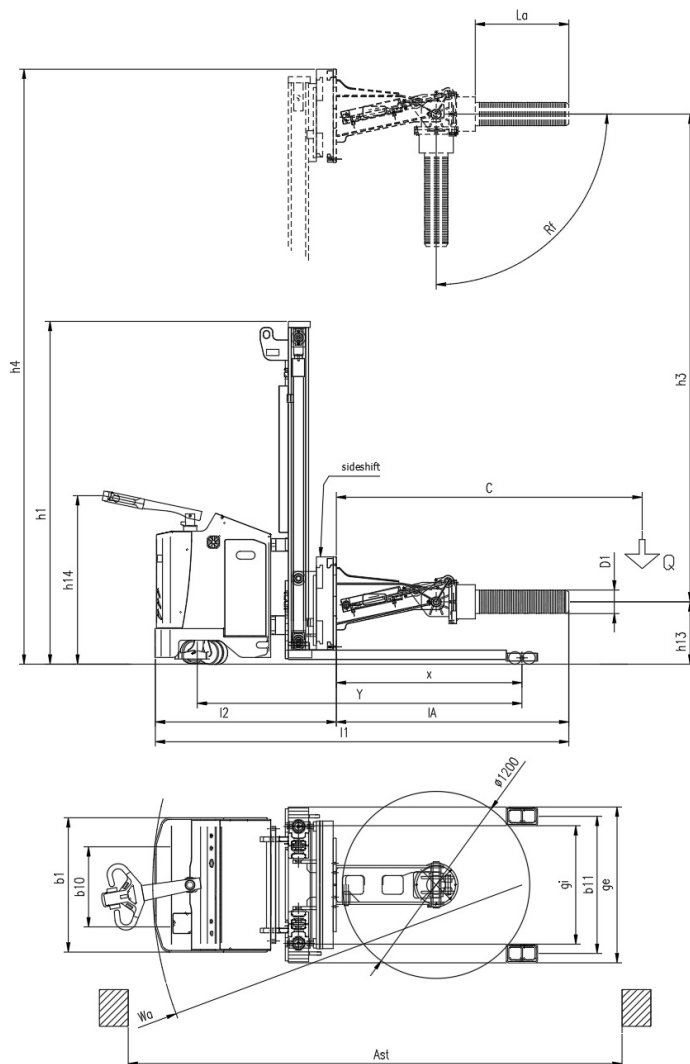

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** SBP TX 3220 SP0

**Categoria**

|                           |                |  |             |        |                 |
|---------------------------|----------------|--|-------------|--------|-----------------|
| <b>General info</b>       | 1.1            | Manufacturer                                     |             |        | CSI s.r.l.      |
|                           | 1.2            | Model  |             |        | SBP TX 3220 SPO |
|                           | 1.3            | Drive  |             |        | elettrico AC    |
|                           | 1.4            | Operator type                                    |             |        | a timone        |
|                           | 1.5            | Load capacity                                    | Q           | t      | 0.6             |
|                           | 1.6            | Load centre                                      | c           | mm     | 2000            |
|                           | 1.8            | Load distance to wheel axle                      | x           | mm     | 1190            |
|                           | 1.9            | Wheelbase  | y           | mm     | 2080            |
|                           | <b>Weights</b> |  |             |        |                 |
|                           | 2.1            | Truck weight without battery                     |             | Kg     | 2200            |
| <b>Wheels and chassis</b> |                |  |             |        |                 |
|                           | 3.1            | Wheels   |             |        | Poliuretano     |
|                           | 3.2            | Wheels size front                                |             | mm     | 250x100         |
|                           | 3.3            | Wheels size rear                                 |             | mm     | 80X80           |
|                           | 3.4            | Additional wheels size                           |             | mm     | 150X50          |
|                           | 3.5            | Number of rear/front wheels (x = Traction wheel) |             |        | 1x+2/2+2        |
|                           | 3.6            | Front wheelbase                                  | b10         | mm     | 500             |
|                           | 3.7            | Rear wheelbase                                   | b11         | mm     | 880             |
|                           | 3.9            | Overall width legs                               | ge          | mm     | 1000            |
|                           | 3.10           | Inside width legs                                | gi          | mm     | 760             |
|                           | 3.12           | Front rotation                                   | Rf          | °      | 90              |
| <b>Dimensions</b>         |                |  |             |        |                 |
|                           | 4.2            | Height mast lowered                              | h1          | mm     | 1790            |
|                           | 4.4            | Lift height                                      | h3          | mm     | 3100            |
|                           | 4.5            | Height mast extended                             | h4          | mm     | 3800            |
|                           | 4.9            | Height of tiller (min/max)                       | h14         | mm     | 975/1535        |
|                           | 4.15           | Height forks lowered                             | h13         | mm     | 300             |
|                           | 4.19           | Overall length                                   | l1          | mm     | 2650            |
|                           | 4.20           | Length to face of forks                          | l2          | mm     | 1160            |
|                           | 4.21           | Overall width                                    | b1          | mm     | 862             |
|                           | 4.22c          | Size of the reel                                 | La/Lb/D1/D2 | mm - Ø | 600/148         |
|                           | 4.23           | Carriage forks                                   |             |        | FEM 3A          |
|                           | 4.31           | Ground clearance                                 |             | mm     | 40              |
|                           | 4.34           | Aisle width                                      | ast         | mm     | 3150            |
|                           | 4.35           | Turning radius                                   | wa          | mm     | 2370            |
| <b>Performance</b>        |                |  |             |        |                 |
|                           | 5.1            | Travel speed with/without load                   |             | Km/h   | 3/5             |
|                           | 5.2            | Lifting speed with/without load                  |             | m/s    | 0.11/0.33       |
|                           | 5.3            | Lowering speed with/without load                 |             | m/s    | 0.5/0.2         |
|                           | 5.8            | Maximum gradeability with/without load           |             | %      | 1/3             |
|                           | 5.10           | Service brake                                    |             |        | elettrico       |
| <b>Motor</b>              |                |  |             |        |                 |
|                           | 6.1            | Traction motor S2 60 min.                        |             | Kw     | 2.5             |
|                           | 6.2            | Lift motor S3                                    |             | Kw     | 3               |
|                           | 6.3            | Battery  |             |        | Piombo acido    |
|                           | 6.4            | Battery - voltage and nominal capacity           |             | V/Ah   | 24V 210Ah       |
|                           | 6.5            | Battery weight                                   |             | Kg     | 210             |
|                           | Dim. batteria  | Battery size                                     |             | mm     | 810/210/450     |
| <b>Other</b>              |                |  |             |        |                 |
|                           | 8.1            | Traction control                                 |             |        | proporzionale   |
|                           | 8.4            | Noise level driver place                         |             |        | <70             |

