

SBP DT INOX 3320


CS Italia s.r.l.



Optional su richiesta info@carrellispeciali.it 

SBP DT INOX 3320

CS Italia s.r.l.

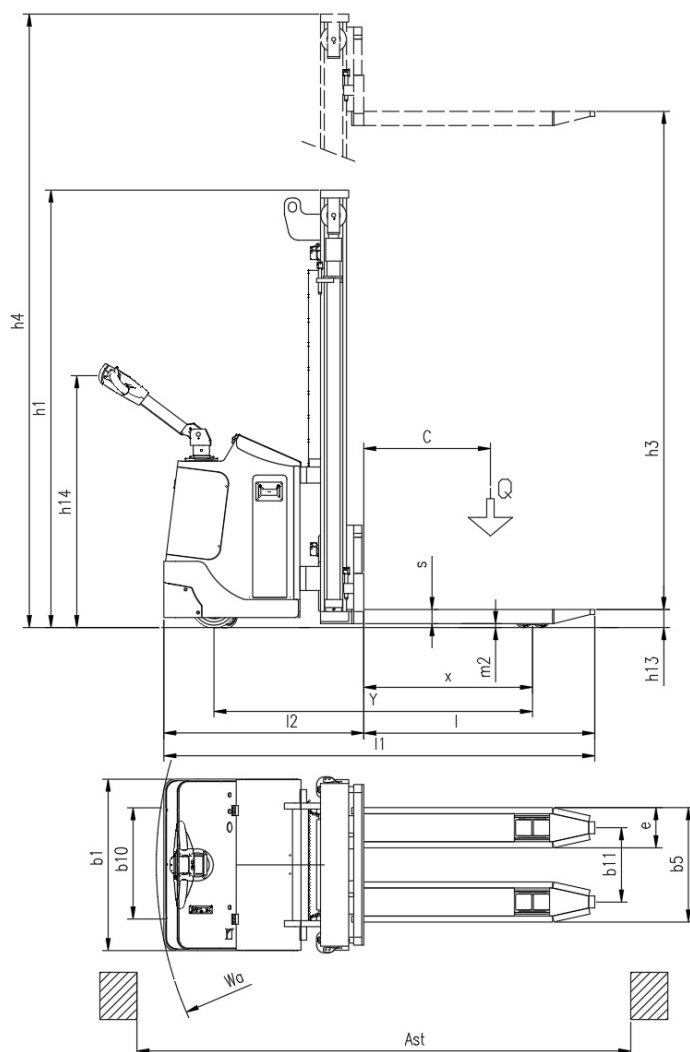

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

Tipologia SBP DT INOX 3320

Categoria Acciaio Inox

| | | | | | |
|---------------------------|----------------|--|-------|------|------------------|
| General info | 1.1 | Manufacturer | | | CSI s.r.l. |
| | 1.2 | Model | | | SBP DT INOX 3320 |
| | 1.3 | Drive | | | elettrico AC |
| | 1.4 | Operator type | | | a timone |
| | 1.5 | Load capacity | Q | t | 2 |
| | 1.6 | Load centre | c | mm | 600 |
| | 1.8 | Load distance to wheel axle | x | mm | 840 |
| | 1.9 | Wheelbase | y | mm | 1575 |
| | Weights | | | | |
| | 2.1 | Truck weight without battery | | Kg | 900 |
| Wheels and chassis | | | | | |
| | 3.1 | Wheels | | | Poliuretano |
| | 3.2 | Wheels size front | | mm | 235x75 |
| | 3.3 | Wheels size rear | | mm | 80x80 |
| | 3.4 | Additional wheels size | | mm | 150x50 |
| | 3.5 | Number of rear/front wheels (x = Traction wheel) | | | 2x /2+2 |
| | 3.6 | Front wheelbase | b10 | mm | 480 |
| | 3.7 | Rear wheelbase | b11 | mm | 370 |
| Dimensions | | | | | |
| | 4.2 | Height mast lowered | h1 | mm | 2180 |
| | 4.4 | Lift height | h3 | mm | 3300 |
| | 4.5 | Height mast extended | h4 | mm | 3785 |
| | 4.9 | Height of tiller (min/max) | h14 | mm | 975/1535 |
| | 4.15 | Height forks lowered | h13 | mm | 90 |
| | 4.19 | Overall length | l1 | mm | 2145 |
| | 4.20 | Length to face of forks | l2 | mm | 995 |
| | 4.21 | Overall width | b1 | mm | 854 |
| | 4.22 | Forks dimensions | s/e/l | mm | 70/200/1150 |
| | 4.25 | Overall forks width size | b5 | mm | 570 |
| | 4.31 | Ground clearance | | mm | 40 |
| | 4.32 | Distanza da piano di lavoro a inizio forca | m2 | mm | 20 |
| | 4.34 | Aisle width | ast | mm | 2450 |
| | 4.35 | Turning radius | wa | mm | 1875 |
| Performance | | | | | |
| | 5.1 | Travel speed with/without load | | Km/h | 3/5 |
| | 5.2 | Lifting speed with/without load | | m/s | 0.11/0.33 |
| | 5.3 | Lowering speed with/without load | | m/s | 0.5/0.2 |
| | 5.8 | Maximum gradeability with/without load | | % | 1/2 |
| | 5.10 | Service brake | | | elettrico |
| Motor | | | | | |
| | 6.1 | Traction motor S2 60 min. | | Kw | 1.2 |
| | 6.2 | Lift motor S3 | | Kw | 2.2 |
| | 6.3 | Battery | | | GEL |
| | 6.4 | Battery - voltage and nominal capacity | | V/Ah | 24V/315 |
| | 6.5 | Battery weight | | Kg | 250 |
| | Dim. batteria | Battery size | | mm | 810/210/570 |
| Other | | | | | |
| | 8.1 | Traction control | | | proporzionale |
| | 8.4 | Noise level driver place | | | <70 |