

**SBP DT INOX 3320**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) ✉

# SBP DT INOX 3320

CS Italia s.r.l.

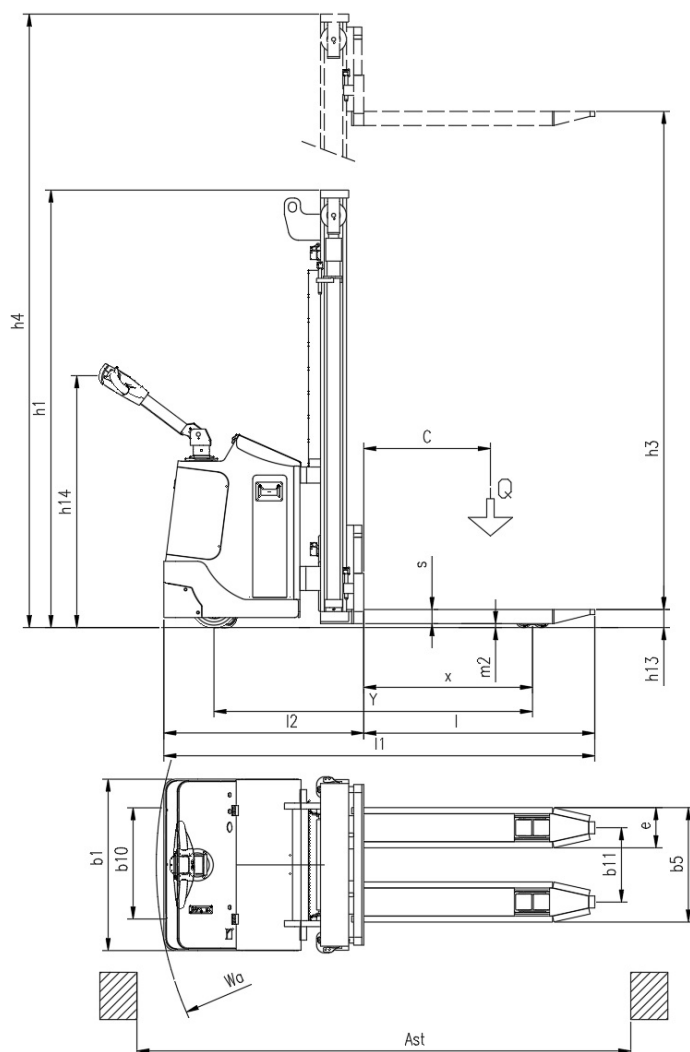

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** SBP DT INOX 3320

**Categoria** Acciaio Inox

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			SBP DT INOX 3320
	1.3	Drive			elettrico AC
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	2
	1.6	Load centre	c	mm	600
	1.8	Load distance to wheel axle	x	mm	840
	1.9	Wheelbase	y	mm	1575
	<b>Weights</b>				
	2.1	Truck weight without battery		Kg	900
<b>Wheels and chassis</b>					
	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	235x75
	3.3	Wheels size rear		mm	80x80
	3.4	Additional wheels size		mm	150x50
	3.5	Number of rear/front wheels (x = Traction wheel)			2x /2+2
	3.6	Front wheelbase	b10	mm	480
	3.7	Rear wheelbase	b11	mm	370
<b>Dimensions</b>					
	4.2	Height mast lowered	h1	mm	2180
	4.4	Lift height	h3	mm	3300
	4.5	Height mast extended	h4	mm	3785
	4.9	Height of tiller (min/max)	h14	mm	975/1535
	4.15	Height forks lowered	h13	mm	90
	4.19	Overall length	l1	mm	2145
	4.20	Length to face of forks	l2	mm	995
	4.21	Overall width	b1	mm	854
	4.22	Forks dimensions	s/e/l	mm	70/200/1150
	4.25	Overall forks width size	b5	mm	570
	4.31	Ground clearance		mm	40
	4.32	Distanza da piano di lavoro a inizio forca	m2	mm	20
	4.34	Aisle width	ast	mm	2450
	4.35	Turning radius	wa	mm	1875
<b>Performance</b>					
	5.1	Travel speed with/without load		Km/h	3/5
	5.2	Lifting speed with/without load		m/s	0.11/0.33
	5.3	Lowering speed with/without load		m/s	0.5/0.2
	5.8	Maximum gradeability with/without load		%	1/2
	5.10	Service brake			elettrico
<b>Motor</b>					
	6.1	Traction motor S2 60 min.		Kw	1.2
	6.2	Lift motor S3		Kw	2.2
	6.3	Battery			GEL
	6.4	Battery - voltage and nominal capacity		V/Ah	24V/315
	6.5	Battery weight		Kg	250
	Dim. batteria	Battery size		mm	810/210/570
<b>Other</b>					
	8.1	Traction control			proporzionale
	8.4	Noise level driver place			<70