

K9 T 20 BS


CS Italia s.r.l.



Optional su richiesta info@carrellispeciali.it 

K9 T 20 BS

CS Italia s.r.l.

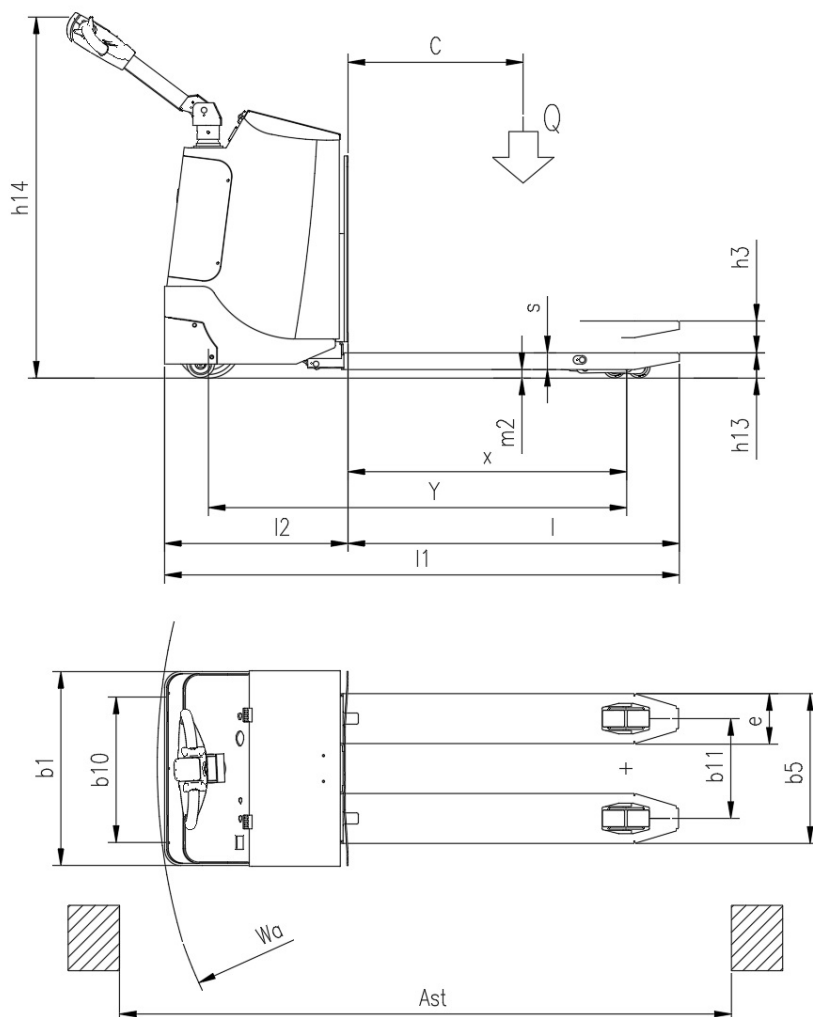

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

Tipologia K9 T 20 BS

Categoria Acciaio Inox

| | | | | | |
|---------------------------|----------------|--|-------|------|---------------|
| General info | 1.1 | Manufacturer | | | CSI s.r.l. |
| | 1.2 | Model | | | K9 T 20 BS |
| | 1.3 | Drive | | | elettrico AC |
| | 1.4 | Operator type | | | a timone |
| | 1.5 | Load capacity | Q | t | 2 |
| | 1.6 | Load centre | c | mm | 600 |
| | 1.8 | Load distance to wheel axle | x | mm | 1005 |
| | 1.9 | Wheelbase | y | mm | 1760 |
| | Weights | | | | |
| | 2.1 | Truck weight without battery | | Kg | 400 |
| Wheels and chassis | | | | | |
| | 3.1 | Wheels | | | Poliuretano |
| | 3.2 | Wheels size front | | mm | 235x75 |
| | 3.3 | Wheels size rear | | mm | 70x80 |
| | 3.4 | Additional wheels size | | mm | 100X38 |
| | 3.5 | Number of rear/front wheels (x = Traction wheel) | | | 1x 1+1/2+2 |
| | 3.6 | Front wheelbase | b10 | mm | 480 |
| | 3.7 | Rear wheelbase | b11 | mm | 360 |
| Dimensions | | | | | |
| | 4.4 | Lift height | h3 | mm | 115 |
| | 4.9 | Height of tiller (min/max) | h14 | mm | 975/1535 |
| | 4.15 | Height forks lowered | h13 | mm | 90 |
| | 4.19 | Overall length | l1 | mm | 1850 |
| | 4.20 | Length to face of forks | l2 | mm | 660 |
| | 4.21 | Overall width | b1 | mm | 790 |
| | 4.22 | Forks dimensions | s/e/l | mm | 60/180/1190 |
| | 4.25 | Overall forks width size | b5 | mm | 540 |
| | 4.31 | Ground clearance | | mm | 30 |
| | 4.32 | Distanza da piano di lavoro a inizio forca | m2 | mm | 30 |
| | 4.35 | Turning radius | wa | mm | 1690 |
| Performance | | | | | |
| | 5.1 | Travel speed with/without load | | Km/h | 4/6 |
| | 5.2 | Lifting speed with/without load | | m/s | 0.11/0.33 |
| | 5.3 | Lowering speed with/without load | | m/s | 0.5/0.2 |
| | 5.8 | Maximum gradeability with/without load | | % | 1/2 |
| | 5.10 | Service brake | | | elettrico |
| Motor | | | | | |
| | 6.1 | Traction motor S2 60 min. | | Kw | 1.2 |
| | 6.2 | Lift motor S3 | | Kw | 2.2 |
| | 6.3 | Battery | | | GEL BS |
| | 6.4 | Battery - voltage and nominal capacity | | V/Ah | 24V 190 |
| | 6.5 | Battery weight | | Kg | 200 |
| | Dim. batteria | Battery size | | mm | 660/260/570 |
| Other | | | | | |
| | 8.1 | Traction control | | | proporzionale |
| | 8.4 | Noise level driver place | | | <70 |