

**SB INOX 1612**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) ✉

# SB INOX 1612

CS Italia s.r.l.

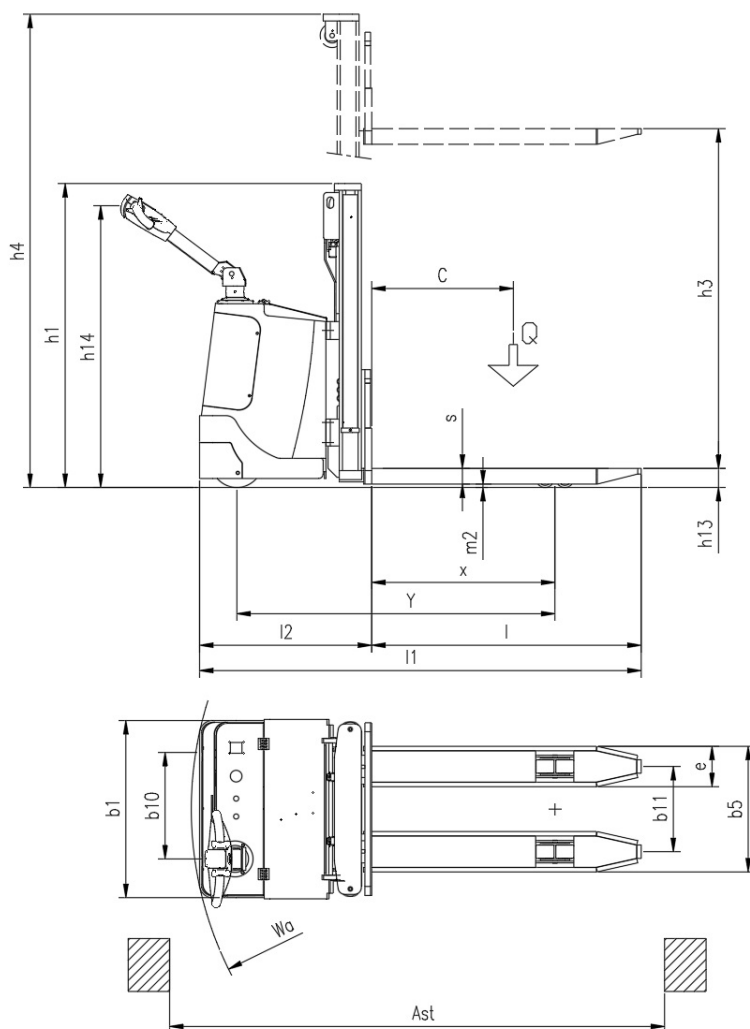

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** SB INOX 1612

**Categoria** Acciaio Inox

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			SB INOX 1612
	1.3	Drive			elettrico
	1.4	Operator type			a timone
	1.5	Load capacity	Q	t	1.2
	1.8	Load distance to wheel axle	x	mm	815
	1.9	Wheelbase	y	mm	1410
	<b>Weights</b>	2.1	Truck weight without battery		Kg
<b>Wheels and chassis</b>	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	235x75
	3.3	Wheels size rear		mm	80x80
	3.4	Additional wheels size		mm	150x50
	3.5	Number of rear/front wheels (x = Traction wheel)			1x/1+2/4
	3.6	Front wheelbase	b10	mm	500
	3.7	Rear wheelbase	b11	mm	380
<b>Dimensions</b>	4.2	Height mast lowered	h1	mm	1360
	4.4	Lift height	h3	mm	1515
	4.5	Height mast extended	h4	mm	2110
	4.9	Height of tiller (min/max)	h14	mm	975/1535
	4.15	Height forks lowered	h13	mm	85
	4.19	Overall length	l1	mm	1960
	4.20	Length to face of forks	l2	mm	760
	4.21	Overall width	b1	mm	790
	4.22	Forks dimensions	s/e/l	mm	60/180/1200
	4.25	Overall forks width size	b5	mm	560
	4.31	Ground clearance		mm	40
	4.32	Distanza da piano di lavoro a inizio forza	m2	mm	25
	4.34	Aisle width	ast	mm	2260
	4.35	Turning radius	wa	mm	1620
	<b>Performance</b>	5.1	Travel speed with/without load		Km/h
5.2		Lifting speed with/without load		m/s	0.11/0.33
5.3		Lowering speed with/without load		m/s	0.5/0.2
5.8		Maximum gradeability with/without load		%	2/3
5.10		Service brake			elettrico
<b>Motor</b>	6.1	Traction motor S2 60 min.		Kw	1.2
	6.2	Lift motor S3		Kw	2.2
	6.3	Battery			GEL
	6.4	Battery - voltage and nominal capacity		V/Ah	24V/250Ah
	6.5	Battery weight		Kg	240
	Dim. batteria	Battery size		mm	720/210/630
<b>Other</b>	8.1	Traction control			elettronico
	8.4	Noise level driver place			<70