

SBC RS 2512


CS Italia s.r.l.



Optional su richiesta info@carrellispeciali.it ✉

SBC RS 2512

CS Italia s.r.l.

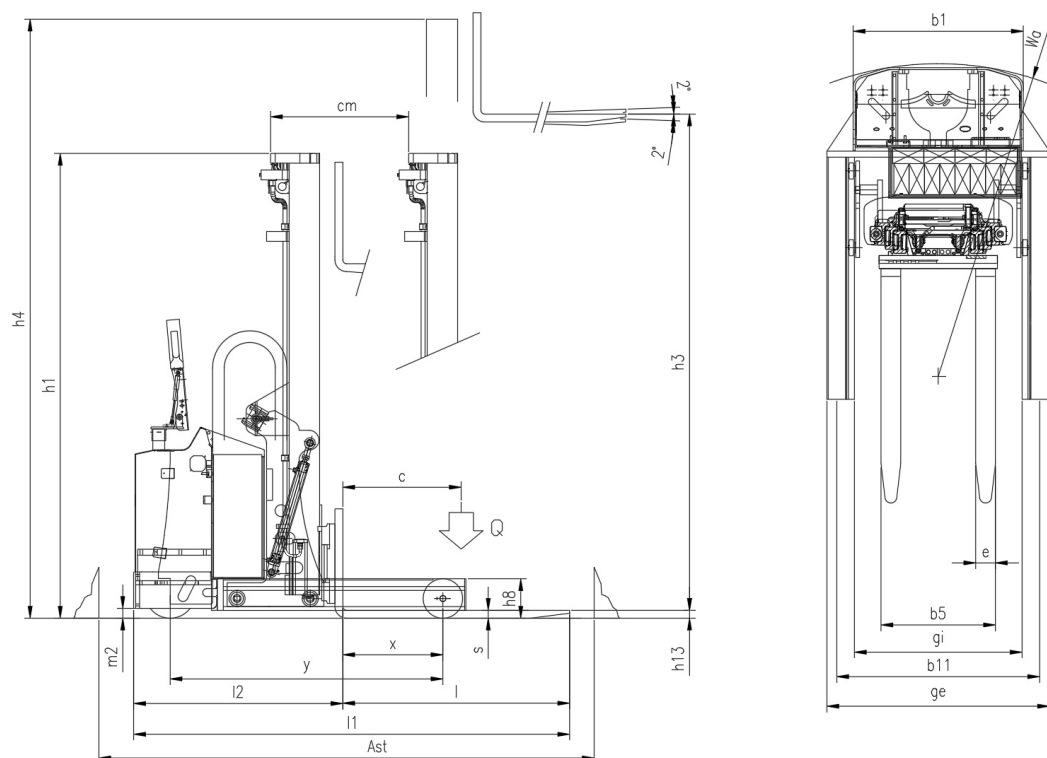

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

Tipologia SBC RS 2512

Categoria Retrattili

| | | | | | |
|---------------------------|----------------|--|-------|------|---------------|
| General info | 1.1 | Manufacturer | | | CSI s.r.l. |
| | 1.2 | Model | | | SBC RS 2512 |
| | 1.3 | Drive | | | elettrico AC |
| | 1.4 | Operator type | | | a timone |
| | 1.5 | Load capacity | Q | t | 1.2 |
| | 1.6 | Load centre | c | mm | 600 |
| | 1.8 | Load distance to wheel axle | x | mm | 505 |
| | 1.9 | Wheelbase | y | mm | 1385 |
| | Weights | | | | |
| | 2.1 | Truck weight without battery | | Kg | 1950 |
| Wheels and chassis | | | | | |
| | 3.1 | Wheels | | | Poliuretano |
| | 3.2 | Wheels size front | | mm | 254x100 |
| | 3.3 | Wheels size rear | | mm | 200x80 |
| | 3.5 | Number of rear/front wheels (x = Traction wheel) | | | 1x/2 |
| | 3.7 | Rear wheelbase | b11 | mm | 1030 |
| | 3.9 | Overall width legs | ge | mm | 1130 |
| | 3.10 | Inside width legs | gi | mm | 850 |
| Dimensions | | | | | |
| | 4.1 | Tilt | | ° | -1/+2 |
| | 4.2 | Height mast lowered | h1 | mm | 1960 |
| | 4.4 | Lift height | h3 | mm | 2450 |
| | 4.5 | Height mast extended | h4 | mm | 2960 |
| | 4.10 | Mast raise | cm | mm | 700 |
| | 4.15 | Height forks lowered | h13 | mm | 40 |
| | 4.19 | Overall length | l1 | mm | 2210 |
| | 4.20 | Length to face of forks | l2 | mm | 1060 |
| | 4.21 | Overall width | b1 | mm | 1130 |
| | 4.22 | Forks dimensions | s/e/l | mm | 35/100/1200 |
| | 4.23 | Carriage forks | | | FEM 2A |
| | 4.25 | Overall forks width size | b5 | mm | 200-620 |
| | 4.31 | Ground clearance | | mm | 40 |
| | 4.32 | Distanza da piano di lavoro a inizio forca | m2 | mm | 40 |
| | 4.34 | Aisle width | ast | mm | 2595 |
| | 4.35 | Turning radius | wa | mm | 1590 |
| Performance | | | | | |
| | 5.1 | Travel speed with/without load | | Km/h | 5/6 |
| | 5.2 | Lifting speed with/without load | | m/s | 0,11/0,33 |
| | 5.3 | Lowering speed with/without load | | m/s | 0,5/0,2 |
| | 5.8 | Maximum gradeability with/without load | | % | 1/3 |
| | 5.10 | Service brake | | | elettrico |
| Motor | | | | | |
| | 6.1 | Traction motor S2 60 min. | | Kw | 2.5 |
| | 6.2 | Lift motor S3 | | Kw | 3 |
| | 6.3 | Battery | | | Piombo acido |
| | 6.4 | Battery - voltage and nominal capacity | | V/Ah | 24V /250Ah |
| | 6.5 | Battery weight | | Kg | 220 |
| | Dim. batteria | Battery size | | mm | 650/245/610h |
| Other | | | | | |
| | 8.1 | Traction control | | | proporzionale |
| | 8.4 | Noise level driver place | | | <70 |

