

**TRS 30- 70 OB XT MINIDONKEY**


CS Italia s.r.l.



Optional su richiesta [info@carrellispeciali.it](mailto:info@carrellispeciali.it) ✉

# TRS 30- 70 OB XT MINIDONKEY

CS Italia s.r.l.

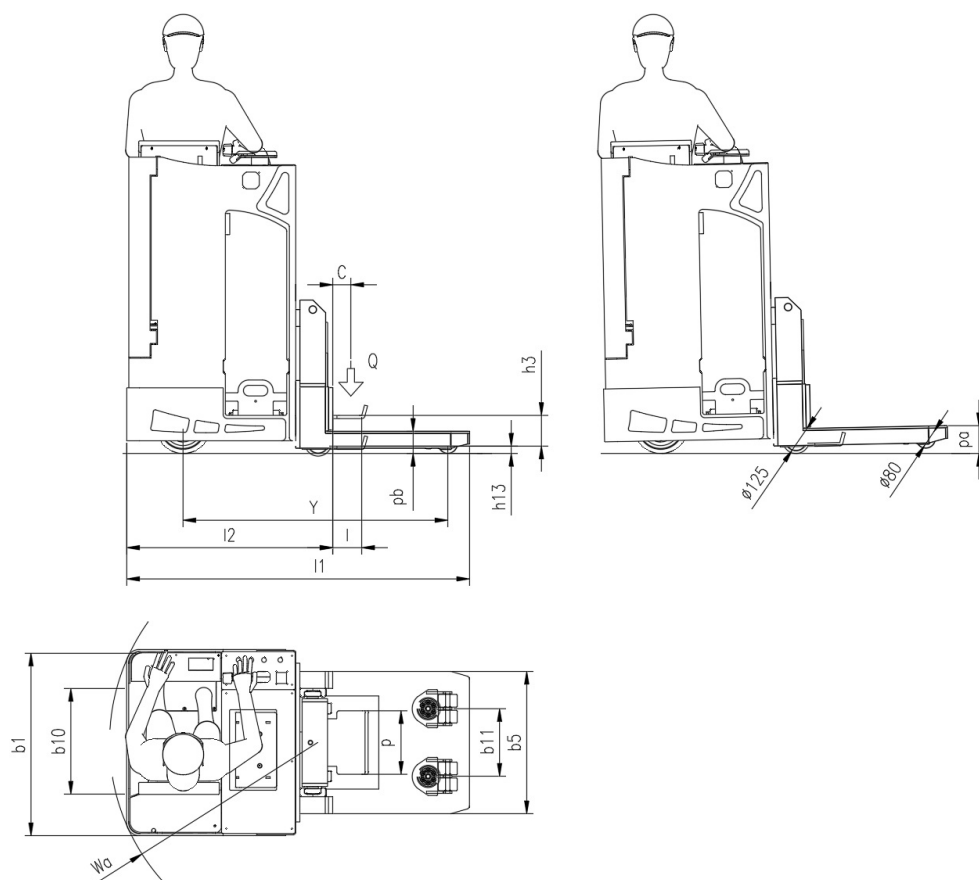

Illustrazioni e dati tecnici non sono impegnativi. Il costruttore si riserva il diritto di apportare modifiche senza preavviso.

**Tipologia** TRS 30- 70 OB XT MINIDONKEY

**Categoria** Aeroportuali

<b>General info</b>	1.1	Manufacturer			CSI s.r.l.
	1.2	Model			TRS 30- 70 OB XT MINIDONKEY
	1.3	Drive			elettrico
	1.4	Operator type			a volante
	1.5	Load capacity	Q	t	3
	1.5a	Towing capacity	Q1	t	7
	1.9	Wheelbase	y	mm	2150
<b>Weights</b>	2.1	Truck weight without battery		Kg	800
<b>Wheels and chassis</b>	3.1	Wheels			Poliuretano
	3.2	Wheels size front		mm	254x100
	3.3	Wheels size rear		mm	125X40
	3.4	Additional wheels size		mm	80X60
	3.5	Number of rear/front wheels (x = Traction wheel)			1x+2/2+2
	3.6	Front wheelbase	b10	mm	500
	3.7	Rear wheelbase	b11	mm	320
<b>Dimensions</b>	4.4	Lift height	h3	mm	145
	4.15	Height forks lowered	h13	mm	35
	4.19	Overall length	l1	mm	1605
	4.20	Length to face of forks	l2	mm	970
	4.21	Overall width	b1	mm	880
	4.22	Forks dimensions	s/e/l	mm	137
	4.22a	Pallet width	p	mm	300
	4.25	Overall forks width size	b5	mm	672
	4.26	Raised platform	pa	mm	120
	4.27	Lowered platform	pb	mm	105
	4.31	Ground clearance		mm	40
	4.35	Turning radius	wa	mm	980
<b>Performance</b>	5.1	Travel speed with/without load		Km/h	3/6
	5.2	Lifting speed with/without load		m/s	0,04/0,05
	5.3	Lowering speed with/without load		m/s	0.5/0.2
	5.8	Maximum gradeability with/without load		%	1/3
	5.10	Service brake			elettrico
<b>Motor</b>	6.1	Traction motor S2 60 min.		Kw	2.5
	6.2	Lift motor S3		Kw	2.2
	6.3	Battery			Piombo acido
	6.4	Battery - voltage and nominal capacity		V/Ah	24V465
	6.5	Battery weight		Kg	360
	Dim. batteria	Battery size		mm	800/280/800
<b>Other</b>	8.1	Traction control			proporzionale
	8.4	Noise level driver place			<70